


Dräger Flame 2500 (IR3) Flame Detection

With its triple IR sensor The Dräger Flame 2500 detects hydrocarbon-based fires even over greater distances. Moreover, it offers a high reliability against false alarms.

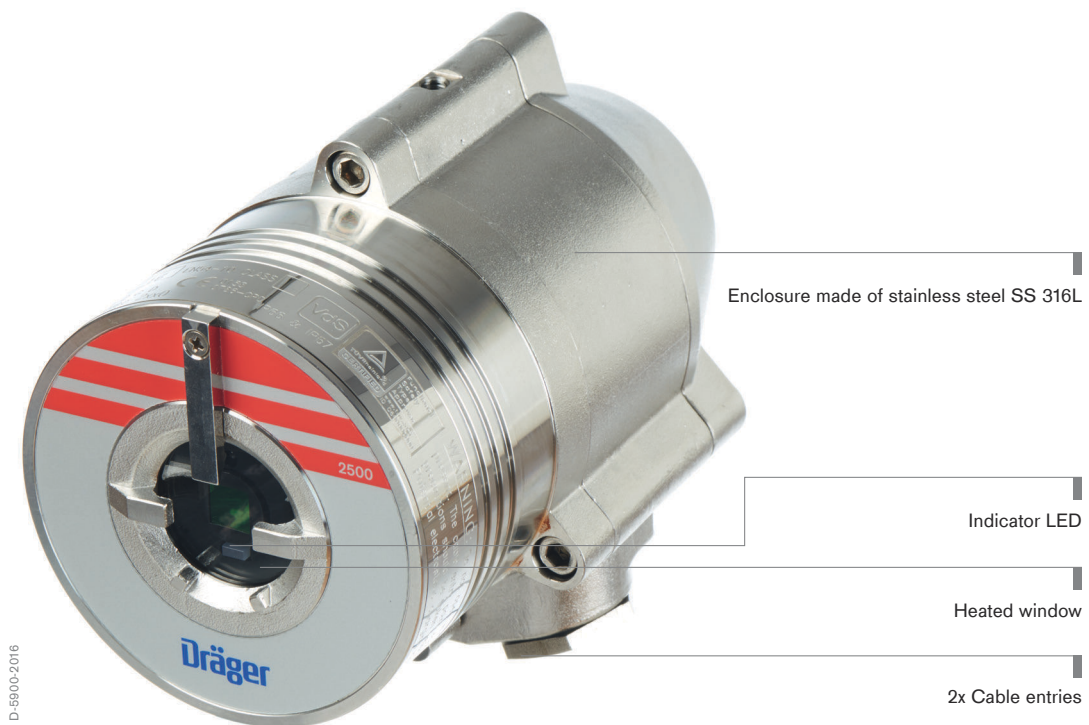

Benefits

Fast and reliable detection

Der Dräger Flame 2500 is equipped with three infrared sensors. They make detection of hydrocarbon-based fires over greater distances possible. This degree of reliability complies with the IEC 61508 safety integrity requirements of SIL2.

Moreover, the flame detector has HART® and RS-485 Modbus interfaces and requires very little power.

Prevention of false alarms

The Flame 2500 is immune to sources of interference. This prevents false alarms. Sources that often cause false alarms, such as welding work or hot CO₂ emissions, no longer pose a problem. Moreover, the sensitive detection ensures that the detector does not falsely set off an alarm for fires emanating from other areas.

Robust and resistant

The housing is very resilient and weatherproof. The viewing window is heated to protect it from icing and fogging up. This allows you to operate the Flame 2500 reliably under the most diverse environmental conditions.

Simple check

The Built-in-Test (BIT) automatically checks the electronics and the optics of the Flame 2500. You can also perform the check manually. A tri-coloured LED at the front of the detector provides a quick status indication. Green indicates normal operation, yellow indicates a fault and red indicates a fire alarm.

System Components



D-6806-2016

Dräger REGARD® 7000

The Dräger REGARD® 7000 is a modular and therefore highly expandable analysis system for monitoring various gases and vapours. Suitable for gas warning systems with various levels of complexity and numbers of transmitters, the Dräger REGARD® 7000 also features exceptional reliability and efficiency. An additional benefit is the backward compatibility with the REGARD®.



D-1130-2010

Dräger REGARD® 3900 Series

The devices of the Dräger REGARD® 3900 series can be used as standalone controllers. You can configure up to 16 measuring channels. In addition, the modular setup enables you to customise the control units to the demands of your plant. You can also embed further features to existing alarms.

Accessories



D-51319-2015

Flame Simulator

The Flame Simulator emits radiation in a unique sequential pattern corresponding to and recognizable by the detector as fire. This allows the detectors to be tested under simulated fire conditions without the associated risks of an open flame.

Accessories



D-5921-2016

Weather Cover

The Weather Cover protects the detector from different weather conditions, such as snow or rain.



D-5925-2016

Laser Pointer

Does the detector cover the area that needs protection? Is it located correctly and does the detector's cone of vision cover the most dangerous spot? This accessory enables the installer to optimise detector location and its actual detection area coverage.



D-5926-2016

Air Shield

The Air Shield allows the installation of detectors of the Dräger Flame 2000 series under tough environmental conditions where they may be exposed to oil vapors, sand, dust and other particulate matter.

Related Products



D-5904-2016

Dräger Flame 2000 (IR)

With its highly sensitive IR sensor the Dräger Flame 2000 detects hydrocarbon-based fires. It offers high reliability against false alarms.



D-5903-2016

Dräger Flame 2100 (UV)

A short response time and high reliability against false alarms are the features of the Dräger Flame 2100. Its UV sensor is quick to detect hydrocarbon- or hydrogen-based fires.



D-5905-2016

Dräger Flame 2350 (UV&IR)

The Dräger Flame 2350 combines UV and IR sensors for the detection of hydrocarbon-based fires. This combination of sensors offers you more security and fewer false alarms.



D-5902-2016

Dräger Flame 2370 (UV&IR)

An extremely short response time and very high reliability against false alarms are the features of the Dräger Flame 2370. It is quick and reliable in detecting hydrocarbon- and hydrogen-based fires, as well as hydroxyl flames, and fires resulting from metallic or inorganic materials. The Flame 2370 can detect a fire flash in less than 20 milliseconds.

Related Products



D-11957-2016

Dräger Flame 2570 (UFI)

Extreme short response time and high reliability against false alarms characterise the Dräger Flame 2570. The ultra fast triple IR flame detector detects hydrocarbon based fire to distance of up to 90 metres.



D-5801-2016

Dräger Flame 2700 (Multi-IR)

With its multichannel IR sensor the Dräger Flame 2700 detects hydrocarbon- and hydrogen-based fires. Thereby it offers a high reliability against false alarms.

Technical Data

Type	Explosion proof IR flame detector for hydrocarbon based fires	
Spectral response	Three IR Bands 4 to 5 μm	
Measuring Performance	Field of view	Horizontal 100°; Vertical 95°
	Response Time	Typically 5 seconds
	Sensitivity Ranges	4 Sensitive ranges for 1 ft ² (0.1 m ²) n-heptane pan fire from 50 ft (15 m) to 215 ft (65 m)
Detection Range (at highest Sensitivity Setting for 1 ft ² (0.1 m ²) pan fire)	Fuel	ft / m
	n-Heptane / Gasoline	215 / 65
	Diesel Fuel / JP5 / Kerosene	150 / 45
	Ethanol 95 %	135 / 40
	Methanol	115 / 35
	IPA (Isopropyl Alcohol)	135 / 40
	Methane / LPG*	150 / 45
	Polypropylene Pellets	115 / 35
	Office Paper	83 / 25

* 30" (0.75 m) high, 10" (0.25 m) width plume fire

Electrical Data

Output Signals	0 – 20 mA (stepped), HART®
Fault Signal	0 +1 mA
BIT Fault Signal	2 mA \pm 10 %
Normal Signal	4 mA \pm 10 %
Warning Signal	16 mA \pm 5 %
Alarm Signal	20 mA \pm 5 %
Relays	Alarm, Fault and Auxiliary SPST volt-free contacts rated 2 A at 30 VDC
RS485	Modbus compatible communication link
Power supply	24 VDC nominal (18 – 32 VDC)
Power Consumption	Standby: Max. 90 mA (110 mA with heated window) Alarm: Max. 130 mA (160 mA with heated window)

Ambient Conditions

Temperature	-55 to +75 °C / -67 to +167 °F (operating) -55 to +85 °C / -67 to +185 °F (option and storage)
Humidity	Up to 95 % non-condensing (withstands up to 100 % RH for short periods)

Enclosure

Material	Stainless steel SS 316L
Material option (only available with ATEX approved versions)	heavy duty copper free aluminum, red epoxy enamel finish
Connecting thread	2 x 3/4" – 14 NPT or 2 x M25 x 1.5 mm
Weight	Detector SS 316L 2.8 kg / aluminum 1.3 kg Tilt mount 1.0 kg
Dimensions Detector	101.6 x 117 x 157 mm
Ingress Protection	IP66 and IP67, NEMA 250 6P

Approvals

ATEX and IECEx	Ex II 2 G D		
	Ex db eb op is IIC T4 Gb	Ex db eb op is IIC T4 Gb	Ex db eb mb op is IIC T4 Gb
	Ex tb op is IIIC T 96 °C Db (Ta -55 °C to +75 °C)	Ex tb op is IIIC T 106 °C Db (Ta -55 °C to +85 °C)	Ex tb op is IIIC T 98 °C Db (Ta -55 °C to +75 °C)

Technical Data

FM/FMC/CSA	Class I Div. 1, Groups B, C & D Class II/III Div. 1, Groups E, F & G
Safety Integrity Level	SIL2 certified by TÜV (EN 61508)
Performance Approval	EN 54-10 (VdS) FM 3260
CE marking	EMI/RFI protected to EN 61326-3 and EN 61000-6-3

Ordering Information

Dräger Flame 2500 (IR3-111SC)	68 13 910
Dräger Flame 2500 (IR3-112SC)	68 13 911
Dräger Flame 2500 (IR3-211SC)	68 13 912
Dräger Flame 2500 (IR3-212SC)	68 13 913
Dräger Flame 2500 (IR3-221SC)	68 13 914
Dräger Flame 2500 (IR3-311SC)	68 13 915
Dräger Flame 2500 (IR3-111AC)	68 13 934
Dräger Flame 2500 (IR3-211AC)	68 13 935
Dräger Flame 2500 (IR3-212AC)	68 13 936
Dräger Flame 2500 (IR3-221AC)	68 13 937
Dräger Flame 2500 (IR3-311AC)	68 13 938
Dräger Flame 2500 (IR3-312AC)	68 13 939
Dräger Flame 2500 (IR3-411AC)	68 13 940
Dräger Flame 2500 (IR3-112SF)	68 13 952
Dräger Flame 2500 (IR3-212SF)	68 13 953
Dräger Flame 2500 (IR3-222SF)	68 13 954
Dräger Flame 2500 (IR3-312SF)	68 13 955

Accessories

Dräger Flame Simulator FS-1100 (IR3)	68 13 973
Dräger Flame 2xx0 Air Shield	68 13 977
Dräger Flame 2xx0 Duct Mount	68 13 978
Tilt Mount Dräger Flame	68 13 979
Weather cover Dräger Flame (SS)	68 13 189
Weather cover Dräger Flame (ABS)	68 13 190
Dräger Flame 2xx0 Laser Pointer	68 13 890
Dräger Flame Pole Mount 3"	68 13 323
Dräger Flame Pole Mount 2"	68 13 322
Dräger Flame USB RS-485 Kit	68 13 994
Battery Pack for Dräger Flame Simulator FS-1x00	68 13 889

HART® is a registered trademark of the HART® Communication Foundation

Notes

Notes

Not all products, features, or services are for sale in all countries.
Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
www.draeger.com

REGION DACH

Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION CENTRAL AND SOUTH AMERICA

Dräger Panama S. de R.L.
Complejo Business Park,
V tower, 10th floor
Panama City
Tel +507 377-9100
Fax +507 377-9130
contactcsa@draeger.com

REGION NORTH AMERICA

Draeger, Inc.
3135 Quarry Road
Telford, PA 18969
Tel +1 800 4DRAGER
(+1 800 437 2437)
Fax +1 215 723 5935
info.usa@draeger.com

Locate your Regional Sales
Representative at:
www.draeger.com/contact

